GARAGE DOOR SPECIALIST

Residential & Commercial Steel Doors



CATALOGUE 2026

IDA International Door Association

Service. Quality. Price

DYNAMIC INDUSTRIES · GDS

Catalogue

Garage doors and hardware · 2026-11

GARAGE DOORS

1061	Modern Flush	2
1062	Infinity Elite	3
1063-X	Infinity Full View	4
1064	Long Carriage	5
1065	Short Panel	6
1066	Flush	7
1067	Long Panel	8
1068	Short Carriage	9
1070	Commercial Ribbed	10
1075	Commercial Steel	11
1020	Mini Short	12
1080	Long Recessed	13
1090	Overlay	14
6000	Lumina Full View	15
Warranty		16

HARDWARE

Company information	18
Torsion Springs	20
Spring Fittings	22
Cable Drums	24
Nylon & Steel Rollers	26
Cables	28
Hinges	29
Shafts, Punched Angles & Chain Hoists	30
Complete Package	31
Brackets	32
Exhaust Ports	38
Hardware Parts	39
Locking Systems	43
Fasteners	47
Track Systems	48
Retainers & Seals	50
Contact	52

Click any line to jump to that page.

MISSISSAUGA TEXT
647-694-1600

VAUGHAN TEXT
(289) 217-7968

EMAIL
sales@dm-ind.com

WEBSITE
www.dm-ind.com

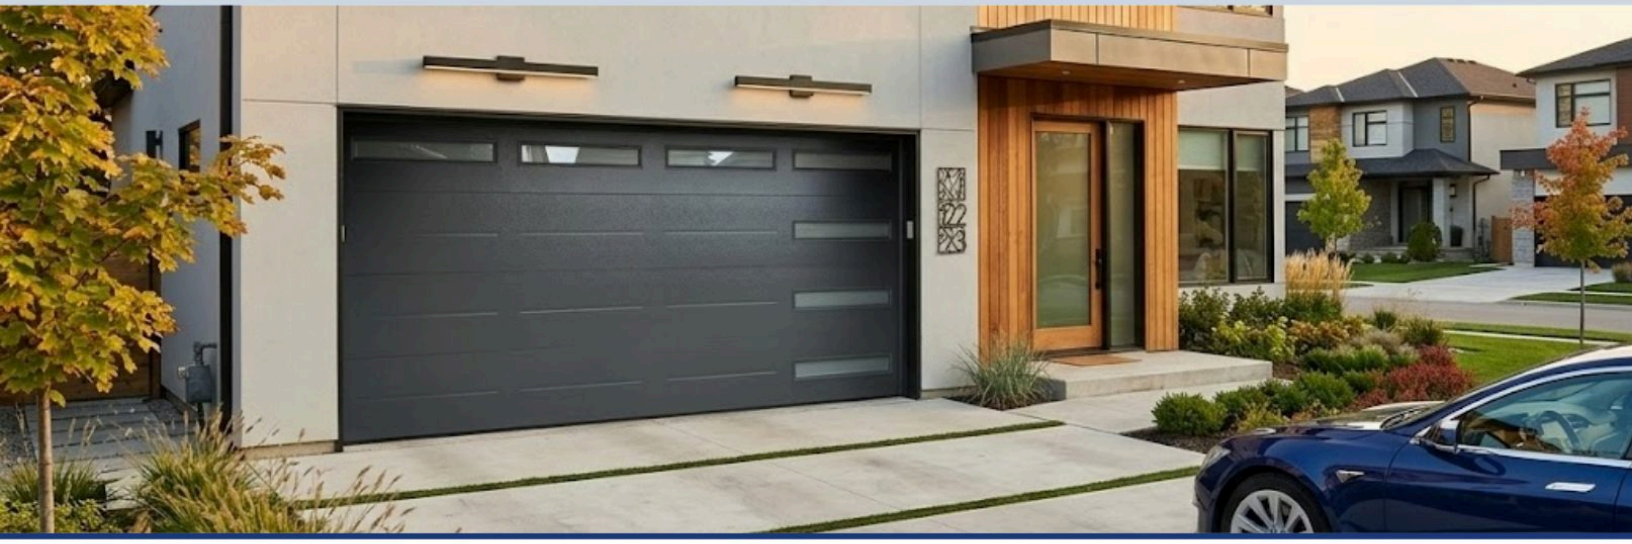

1061 MODERN FLUSH STEEL PANEL

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential & Commercial

2"	26ga	R-17.68	20ga	7	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1061 Modern Flush is a premium insulated steel garage door built for homeowners who demand lasting curb appeal, superior energy efficiency, and low maintenance year-round.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish on both sides delivers beauty and performance in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 7 OPTIONS

White · Charcoal · Sandstone · Choc Brown · Walnut · Black · Dark Brown

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL 647-588-3302

TEXT 647-694-1600

EMAIL sherwin@dm-ind.com

WEBSITE www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1

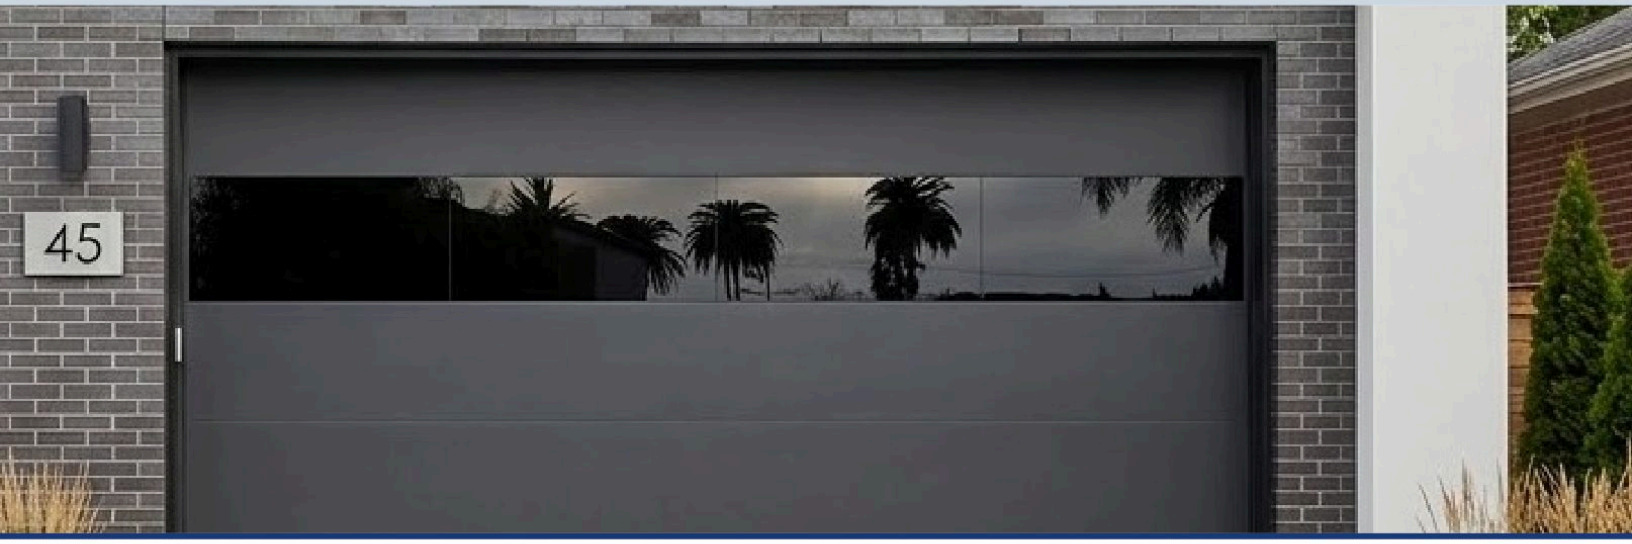

1062 INFINITY ELITE SERIES

Steel + Glass Combination · 2" Insulated · Residential & Commercial

2"	26ga	R-17.68	5mm	9	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	TEMPERED GLASS	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer insulated steel sandwich panels
- 26ga hot dipped galvanized steel
- Woodgrain embossed steel sections
- 5mm tempered safety glass sections
- 6063-T6 aluminum glass frame
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- CFC-free polyurethane insulation
- All standard openers compatible

STEEL PANEL — 1066

Gauge	26ga galvanized steel
Insulation	CFC-free polyurethane R-17.68
Finish	Woodgrain embossed both sides
Paint	Polyester top / Epoxy back
Zinc Coat	Z60 g/m² double sides

GLASS PANEL — 1063

Glass	5mm tempered safety
Frame Alloy	6063-T6 aluminum
Frame	3mm — high rigidity
Finish	Anodized or powder-coated
Glass Type	Tinted standard / Clear option

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18'
Heights	7' 7'6" 8' up to 14'
Lead Time	3 – 4 weeks after order

THE INFINITY ELITE

The 1062 Infinity Elite is the perfect fusion of two world-class products — combining the insulated strength of the 1066 Flush steel panel with the modern elegance of the 1063-X Infinity full-view glass panel.

Choose how many glass sections and where they appear — top row, mid section, or scattered throughout. Every door is custom configured to match your vision.

THE FORMULA

1063 Glass Panel + **1066 Steel Panel** = **1062 Infinity Elite**

GLASS OPTIONS

Tinted	Standard — in stock Toronto
Clear	Available on request
Frosted	Available — 8 week lead time

AVAILABLE COLOURS — 9 OPTIONS

White · Charcoal · Sandstone · Choc Brown · Walnut · Black · Dark Brown · Matt Black · Matt Grey

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL 647-588-3302
TEXT 647-694-1600
EMAIL sherwin@dm-ind.com
WEBSITE www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1

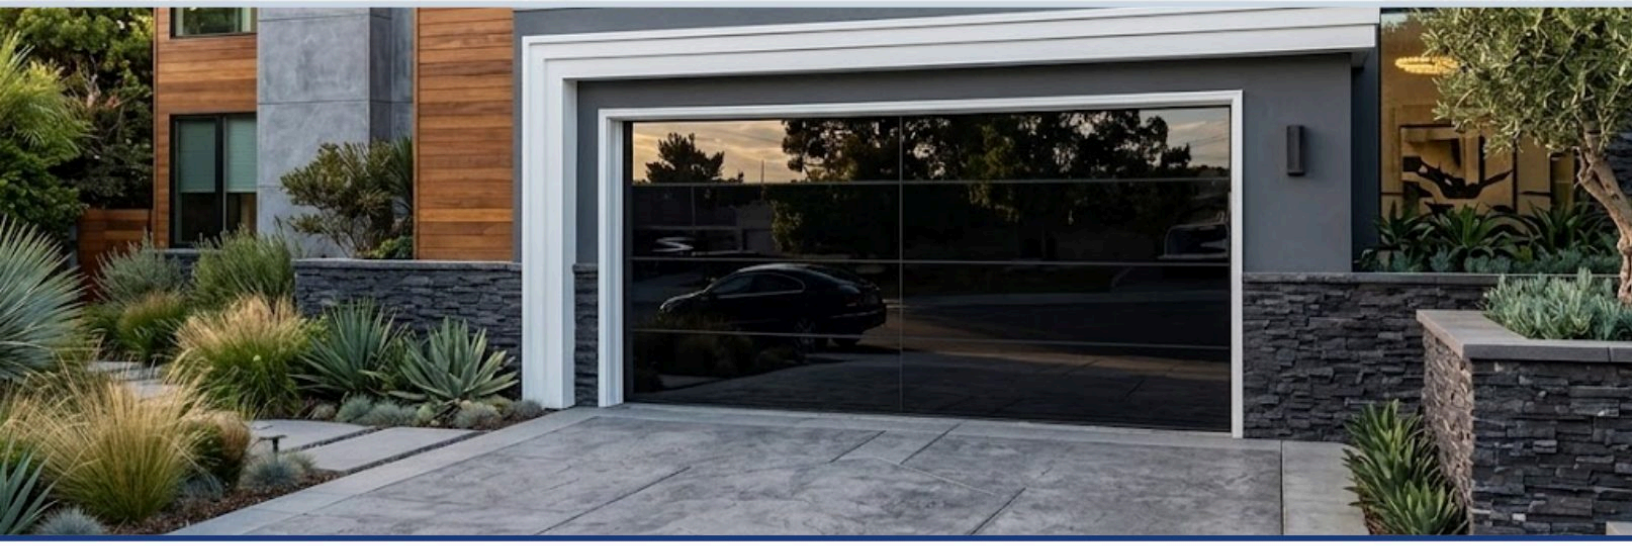

1063-X INFINITY FULL VIEW

Single Pane Aluminum Glass · Non-Insulated · Residential & Commercial

5mm	3mm	50mm	24'	Single	CL.3
TEMPERED GLASS	FRAME THICKNESS	PANEL SECTION	MAX PANEL LENGTH	PANE GLASS	WIND RESISTANCE

GLASS FINISH OPTIONS

TINTED
Reduces glare & solar heat gain
★ STANDARD — IN STOCK TORONTO

FROSTED
Soft diffused light, privacy maintained
OPTION — 8 WEEK LEAD TIME

CLEAR
Full transparency, maximum natural light
OPTION — 8 WEEK LEAD TIME

GLASS & PANEL SPECS

Glass Thickness	5mm Tempered Safety
Glass Type	Single Pane — Non-Insulated
Panel Section	50mm (2")
Section Width	18" / 21" / 24"
Glass Pcs / Door	1 pc ≤10' | 2 pcs 10'–18'
Wind Resistance	Class 3

FRAME & CONSTRUCTION

Frame Material	6063-T6 Aluminum alloy
Frame Thickness	3mm — high rigidity
Surface Finish	Anodized or powder-coated
Section Joints	Tongue & groove
Bottom Seal	Replaceable rubber
Corner Joints	Mechanically fastened
Corrosion	Reinforced fins + galv. brackets
Opener Compat.	All standard openers

AVAILABLE SIZES

Stock Widths	8' 9' 10' 12' 16'
Special Order	18' – 24' max
Heights	Up to 14' custom
Lead Time	3 – 4 weeks after order

THE INFINITY DIFFERENCE

The 1063-X Infinity is a full-view single pane aluminum glass garage door engineered for homeowners and commercial clients who want clean modern lines, maximum visibility, and lasting quality.

Built with 6063-T6 aluminum alloy and 5mm tempered safety glass. Tinted glass in Toronto stock for fast delivery.

FRAME COLOUR

Black
Standard — Black aluminum frame
Powder-coated, all weather resistant

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL
647-588-3302

TEXT
647-694-1600

EMAIL
sherwin@dm-ind.com

WEBSITE
www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1



1064 LONG CARRIAGE HOUSE DOOR

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential & Commercial

2"	26ga	R-17.68	20ga	9	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1064 Long Carriage House door combines the timeless charm of carriage house styling with modern insulated steel construction — built for homeowners who want character and performance.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish delivers beauty and energy efficiency in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 9 OPTIONS

White · Charcoal · Sandstone · Choc Brown · Walnut · Black · Dark Brown · Brown · Bronze

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL 647-588-3302

TEXT 647-694-1600

EMAIL sherwin@dm-ind.com

WEBSITE www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1

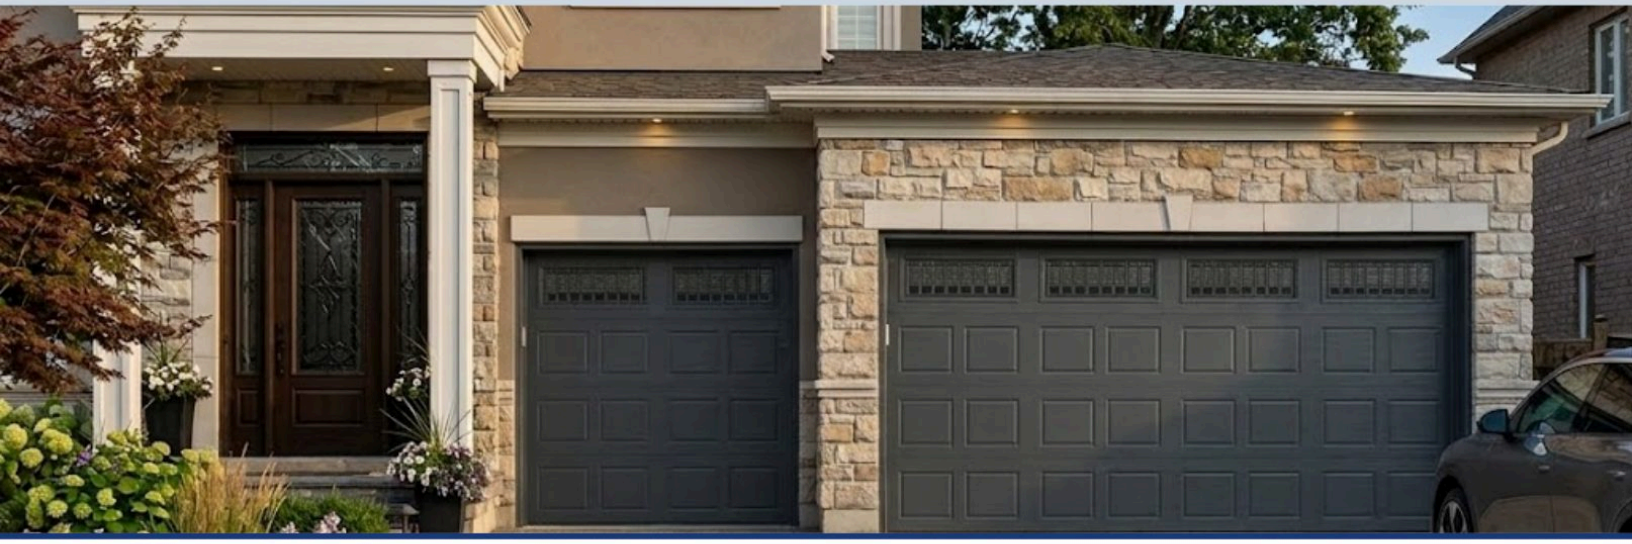

1065 SHORT PANEL STEEL PANEL

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential & Commercial

2"	26ga	R-17.68	20ga	7	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1065 Short Panel is a premium insulated steel garage door built for homeowners who demand lasting curb appeal, superior energy efficiency, and low maintenance year-round.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish on both sides delivers beauty and performance in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 7 OPTIONS

White · Charcoal · Sandstone · Black · Dark Brown · Brown · Bronze

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL 647-588-3302
TEXT 647-694-1600
EMAIL sherwin@dm-ind.com
WEBSITE www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1

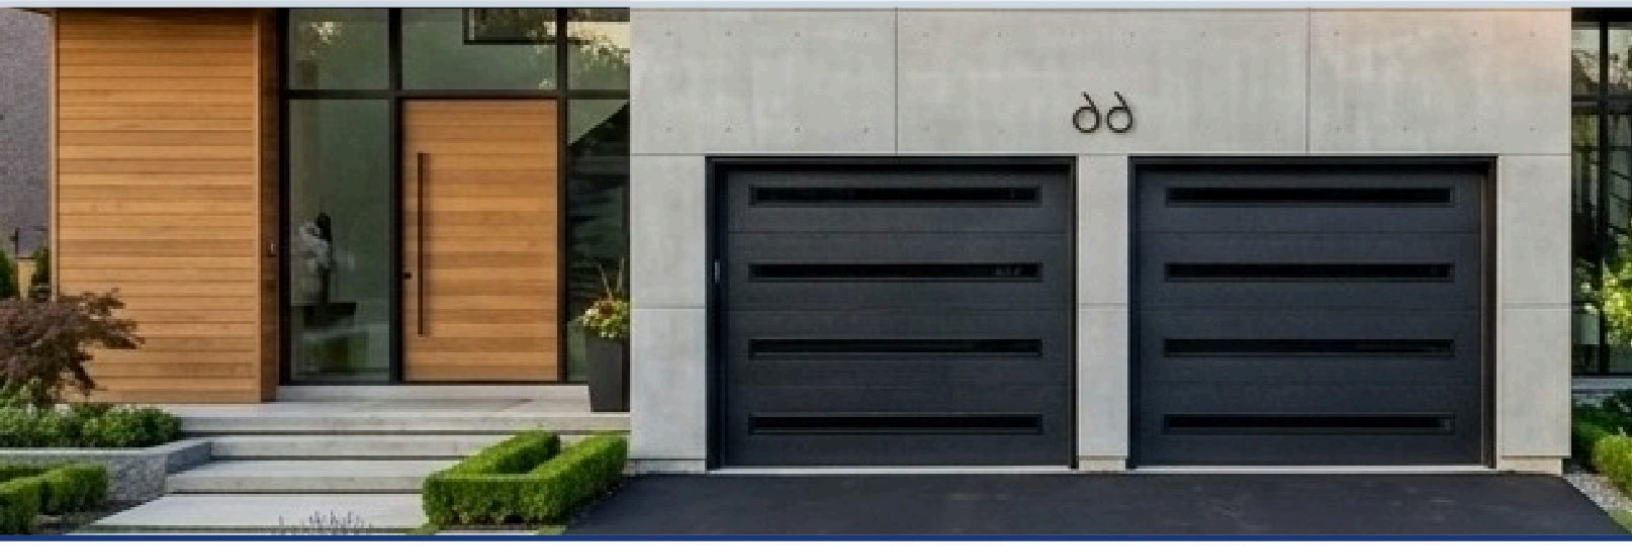

1066 FLUSH STEEL PANEL

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential & Commercial

2"	26ga	R-17.68	20ga	11	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1066 Flush is a premium insulated steel garage door built for homeowners who demand lasting curb appeal, superior energy efficiency, and low maintenance year-round.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish delivers beauty and performance in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 11 OPTIONS

White · Charcoal · Sandstone · Choc Brown · Walnut · Black · Dark Brown · Brown · Bronze · Matt Black · Matt Grey

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL
647-588-3302

TEXT
647-694-1600

EMAIL
sherwin@dm-ind.com

WEBSITE
www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1

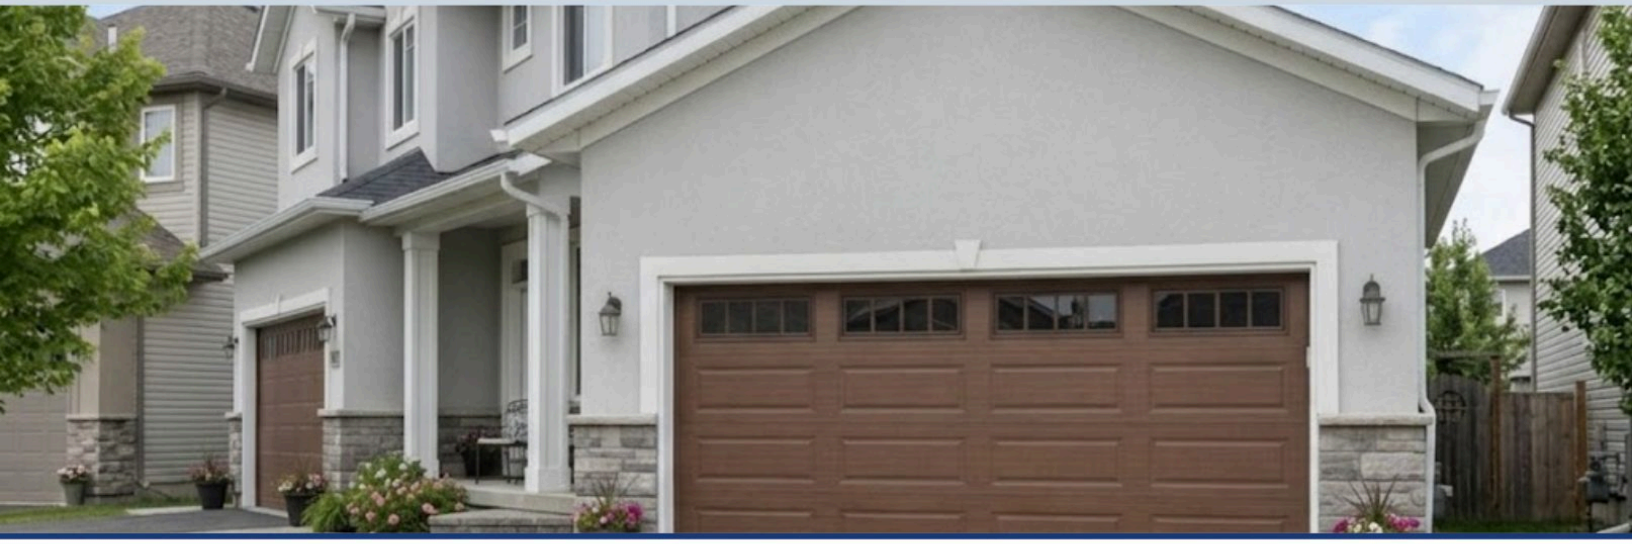

1067 LONG PANEL STEEL PANEL

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential & Commercial

2"	26ga	R-17.68	20ga	9	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1067 Long Panel is a premium insulated steel garage door built for homeowners who demand lasting curb appeal, superior energy efficiency, and low maintenance year-round.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish on both sides delivers beauty and performance in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 9 OPTIONS

White · Charcoal · Sandstone · Choc Brown · Walnut · Black · Dark Brown · Brown · Bronze

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL 647-588-3302
TEXT 647-694-1600
EMAIL sherwin@dm-ind.com
WEBSITE www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1



1068 SHORT CARRIAGE STEEL PANEL

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential & Commercial

2"	26ga	R-17.68	20ga	7	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1068 Short Carriage House is a premium insulated steel garage door built for homeowners who demand lasting curb appeal, superior energy efficiency, and low maintenance year-round.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish on both sides delivers beauty and performance in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 7 OPTIONS

White · Charcoal · Sandstone · Black · Dark Brown · Brown · Bronze

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL 647-588-3302

TEXT 647-694-1600

EMAIL sherwin@dm-ind.com

WEBSITE www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1



1070 COMMERCIAL RIBBED PANEL

26 Gauge Galvanized Steel · R-17.68 Insulated · Commercial & Agricultural

2"	26ga	R-17.68	20ga	9	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Ribbed commercial panel design
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	Up to 20' custom
Custom	Special sizes on request
Lead Time	3 – 4 weeks

BUILT FOR COMMERCIAL

The 1070 Commercial Ribbed is purpose-built for agricultural, industrial, and commercial applications where strength, insulation, and durability are non-negotiable.

The ribbed panel design provides extra rigidity for wide openings. R-17.68 CFC-free polyurethane foam delivers year-round thermal efficiency.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Commercial & Agricultural

AVAILABLE COLOURS — 9 OPTIONS

White · Charcoal · Sandstone · Choc Brown · Walnut · Black · Dark Brown · Brown · Bronze

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL 647-588-3302
TEXT 647-694-1600
EMAIL sherwin@dm-ind.com
WEBSITE www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1



1075 COMMERCIAL STEEL PANEL

Foam Insulated · 26 Gauge Galvanized Steel · Residential & Commercial

2"	26ga	R-16	CL.3	3-Layer	20'
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	WIND RESISTANCE	SANDWICH CONSTRUCT.	MAX WIDTH

3-LAYER CONSTRUCTION

Outer Skin	26ga galvanized steel
Foam Core	Polyurethane foam injection
Inner Skin	Steel backer panel

KEY FEATURES

- Tongue & groove meeting rails
- 20ga full-height hinge plates
- Replaceable vinyl bottom seal
- Baked-on 2-coat paint system
- Rust & corrosion resistant
- 5mm tempered safety glass option
- All standard openers compatible

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	Custom — up to 20'
Custom	Special sizes on request
Lead Time	3 – 4 weeks after order

GLASS OPTIONS

Clear	Full transparency
Tinted	Reduces glare & solar heat
Frosted	Privacy & diffused light

PANEL SPECIFICATIONS

Panel Thickness	2" (50mm)
Steel Gauge	26ga galvanized
Insulation	R-16 polyurethane foam
Wind Rating	Class 3

ENGINEERED FOR PERFORMANCE

The 1075 Commercial Steel Panel is purpose-built for commercial and agricultural applications where strength, insulation, and durability are non-negotiable.

A 3-layer sandwich of 26 gauge galvanized steel with high-density polyurethane foam delivers R-16 insulation and Class 3 wind resistance year-round.

The baked-on 2-coat paint system resists fading, chalking, and corrosion for long-lasting curb appeal with minimal maintenance.

FRAME COLOURS

Black · Dark Brown · White

6000 LUMINA GLASS — FULL VIEW SECTION

CLEAR	Max natural light & transparency
FROSTED	Privacy & soft diffused light
TINTED	Glare control & solar reduction

AVAILABLE COLOURS — 3 OPTIONS

White · Black · Dark Brown

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL
647-588-3302

TEXT
647-694-1600

EMAIL
sherwin@dm-ind.com

WEBSITE
www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1



1020 MINI SHORT STEEL PANEL

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential & Commercial

2"	26ga	R-17.68	20ga	7	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1020 Mini Short is a premium insulated steel garage door built for homeowners who demand lasting curb appeal, superior energy efficiency, and low maintenance year-round.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish on both sides delivers beauty and performance in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 7 OPTIONS

White · Charcoal · Sandstone · Black · Dark Brown · Brown · Bronze

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL
647-588-3302

TEXT
647-694-1600

EMAIL
sherwin@dm-ind.com

WEBSITE
www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1



1080 LONG RECESSED GARAGE DOOR

26 Gauge Galvanized Steel · R-17.68 Insulated · Residential

2"	26ga	R-17.68	20ga	7	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

ENGINEERED FOR HOME

The 1080 Long Recessed is a premium insulated steel garage door built for homeowners who demand lasting curb appeal, superior energy efficiency, and low maintenance year-round.

R-17.68 CFC-free polyurethane foam with woodgrain embossed finish on both sides delivers beauty and performance in every Canadian season.

PAINT SYSTEM

Top Paint	Polyester — heat cured
Back Paint	Epoxy — color as mill
Color Tolerance	Delta ≤ 1.5
Thickness	Top 25um / Back 7–9um
Zinc Coating	Z60 g/m² double sides
Applications	Residential & Commercial

AVAILABLE COLOURS — 7 OPTIONS

White · Charcoal · Sandstone · Black · Dark Brown · Brown · Bronze

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL
647-588-3302

TEXT
647-694-1600

EMAIL
sherwin@dm-ind.com

WEBSITE
www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1

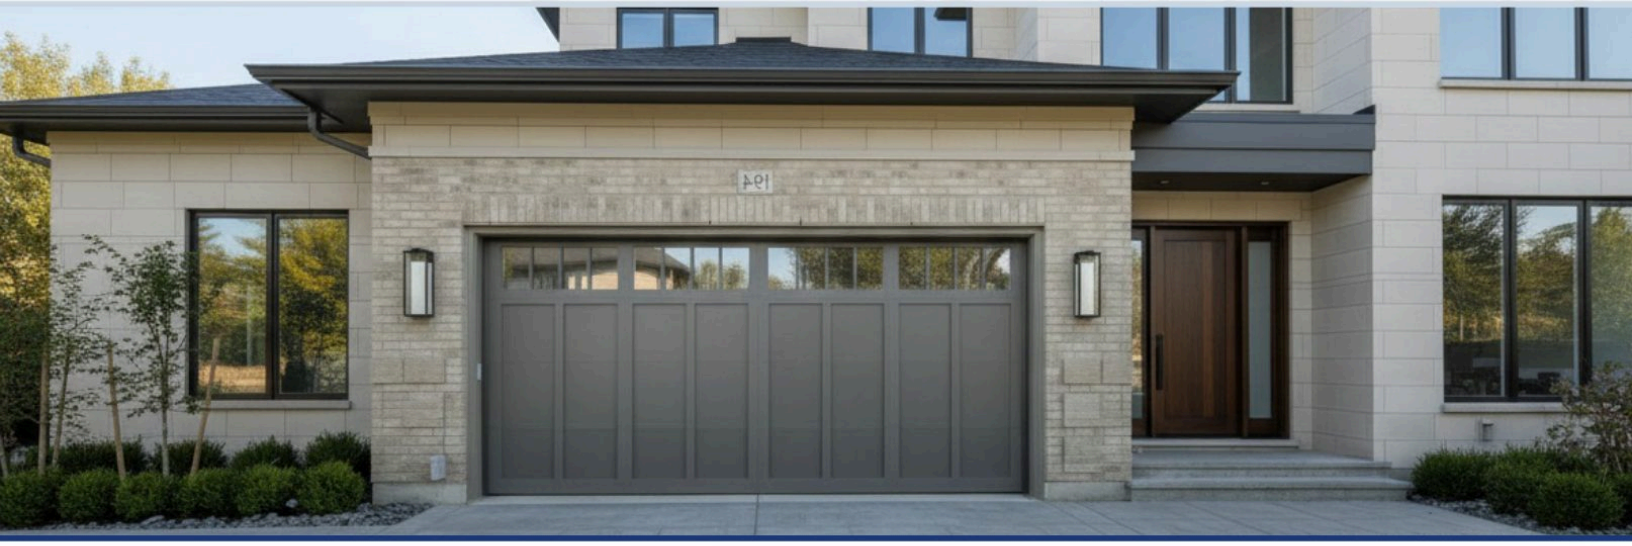

1090 OVERLAY

PVC Overlay · Real Wood Grain Texture · 2-7/8" · Residential & Commercial

2"	26ga	R-17.68	20ga	11	CL.3
PANEL THICKNESS	STEEL GAUGE	INSULATION VALUE	HINGE PLATES	COLOUR OPTIONS	WIND RESISTANCE

KEY FEATURES

- 3-layer steel sandwich construction
- 26ga hot dipped galvanized steel
- Woodgrain embossed interior & exterior
- 14 gauge galvanized steel hinges
- 20 gauge steel hinge & hardware plates
- Tongue & groove section joints
- Replaceable 3.5" bottom rubber seal
- Vinyl 'U' type bottom retainer
- CFC-free polyurethane insulation
- All standard openers compatible

CONSTRUCTION LAYERS

Outer Skin	26ga galvanized steel
Paint (ext.)	Polyester — 0.75 MIL
Foam Core	CFC-free polyurethane R-17.68
Inner Skin	Steel backer panel
Paint (int.)	Epoxy — 0.3 MIL
Zinc Coating	Z60 g/m² double sides

AVAILABLE SIZES

Widths	8' 9' 10' 12' 14' 16' 18' 20'
Heights	6'6" 7' 7'6" 8' up to 14'
Custom	Special sizes on request
Lead Time	3 – 4 weeks

PVC OVERLAY DETAILS

Material	Polyvinyl Chloride (PVC)
Appearance	Real wood grain texture
Thermal Break	Polypropylene section break
Steel End Stiles	20 gauge pre-painted
Backer Plate	Interior 20 gauge steel
Windows	Available up to 10' height
Maintenance	Low — no repainting needed
Applications	Residential & Commercial

WHY CHOOSE 1090?

The 1090 Overlay combines the strength of insulated steel with the beauty of real wood grain PVC — no painting, no warping, no maintenance.

AVAILABLE COLOURS — 11 OPTIONS

White · Charcoal · Sandstone · Choc Brown · Walnut · Black · Dark Brown · Brown · Bronze · Matt Black · Matt Grey

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL	TEXT	EMAIL	WEBSITE
647-588-3302	647-694-1600	sherwin@dm-ind.com	www.dm-ind.com

4180 Sladeview Cres, Unit 2, Mississauga, Ontario L5L 0A1

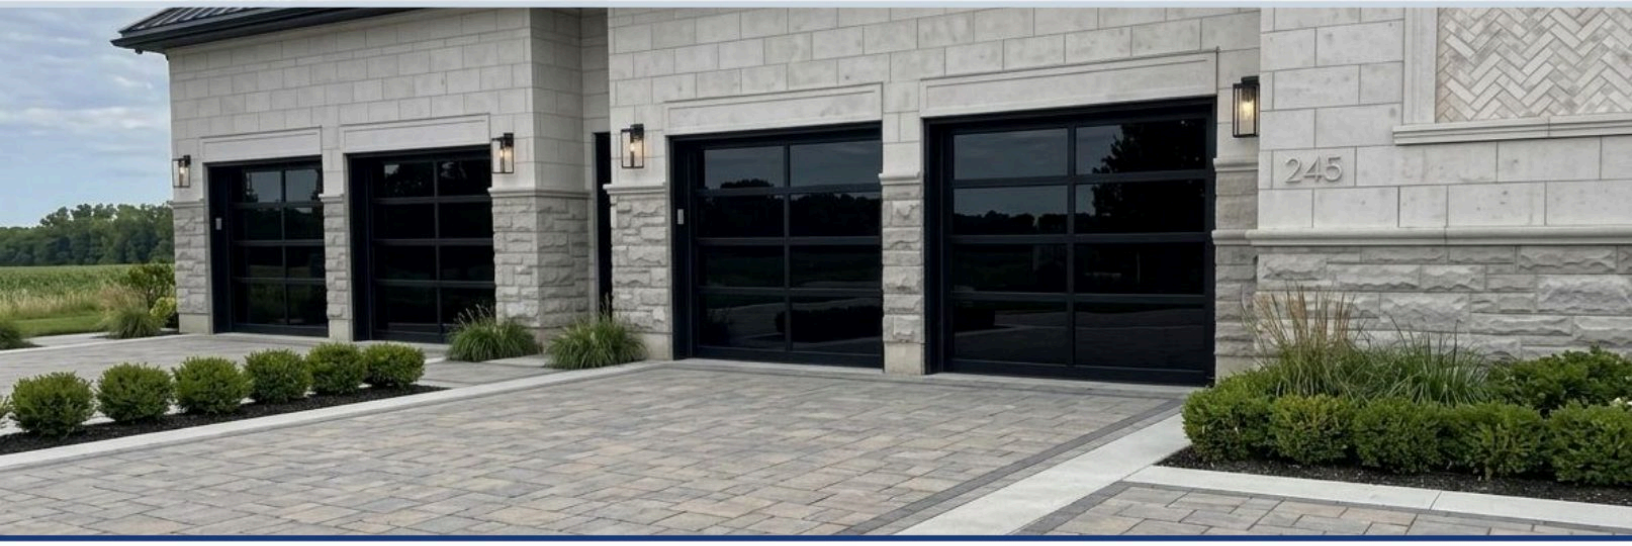

6000 LUMINA FULL VIEW

Full View Aluminum Glass · Custom-Made to Order · Residential & Commercial

2"	3mm	1/8"	1/2"	8	20'
FRAME THICKNESS	WALL THICKNESS	SINGLE GLASS	THERMAL GLASS	GAUGE HINGES	MAX WIDTH

MODEL LINEUP — 8 SERIES

6100	Single Clear · Non-Insulated
6200	Single Frosted · Non-Insulated
6300	Single Tinted · Non-Insulated
6400	ACM Panel · Solid / Opaque
6500	Thermal Clear · Insulated
6600	Thermal Frosted · Insulated
6700	Thermal Tinted · Insulated
6800	Tinted + Frosted · Clear/Privacy

FRAME & CONSTRUCTION

Material	Heavy-duty aluminum alloy
Surface Finish	Anodized or powder-coated
Section Joints	Tongue & groove
Bottom Seal	Replaceable rubber
Wind Rating	Class 3
Track System	Standard 15R / 12R
Spring System	Torsion spring
Opener Compat.	All standard openers

AVAILABLE SIZES

All Sizes	Custom made to order
Max Width	20' (6.1m)
Max Height	Custom — up to 14'
Lead Time	3 – 4 weeks after order

ENGINEERED FOR LIGHT

The 6000 Lumina Series is a full-view aluminum and glass garage door purpose-built to flood any space with natural light — without sacrificing strength or security.

Every door is custom made to order. Choose your frame colour, glass finish, and glass per section to perfectly match your architecture.

GLASS FINISHES

Clear	Max natural light
Frosted	Privacy + diffused light
Tinted	Glare & solar control

FRAME COLOURS

Black	Matte / Anodized
Dark Brown	Powder-coated
White	Powder-coated

AVAILABLE COLOURS — 3 OPTIONS

White

Black

Dark Brown

5-YEAR LIMITED LIFETIME WARRANTY

SECTIONS · HARDWARE · SPRINGS · GLASS

CELL
647-588-3302

TEXT
647-694-1600

EMAIL
sherwin@dm-ind.com

WEBSITE
www.dm-ind.com

DYNAMIC INDUSTRIES GDS

LIMITED 5-YEAR WARRANTY

GARAGE DOOR PANELS · TRACK · HARDWARE · SPRINGS · GLASS

LIMITED 5-YEAR WARRANTY

5 YRS	5 YRS	3 YRS	10,000 CYCLES
DOOR SECTIONS (ORIGINAL OWNER)	SECTIONS (OTHER RESIDENTIAL)	WINDOWS, TRACK & HARDWARE	SPRINGS (RESIDENTIAL)

WARRANTY COVERAGE

5 YEARS	**Door Sections**	GDS warrants door sections against defects in material, workmanship, and deterioration due to rust-through (metal perforation) for five (5) years from date of delivery — residential single-family, owner-occupied installations only.
5 YEARS	**Door Sections**	For all other residential installations, GDS warrants door sections against delamination (separation of front and back steel skins) for five (5) years from the date of delivery to the original purchaser.
3 YEARS	**Windows**	Window components are warranted for three (3) years from the date of delivery to the original purchaser, excluding glass. Weather-stripping is excluded as it is subject to normal wear.
3 YEARS	**Track & Hardware**	All track and hardware components — including horizontal and vertical track, hinges, rollers, brackets, cables, drums and bearings (excluding springs) — are warranted against defects in materials and workmanship for three (3) years from date of installation.
10,000 CYCLES	**Springs**	Torsion and extension springs are warranted against defects in materials and workmanship for 10,000 cycles under normal residential use.

WARRANTY EXCLUSIONS

Abuse & Misuse
Damage caused by abuse, misuse, neglect, or improper operation of the door or its components.

Improper Installation
Defects or damage resulting from installation not performed by an authorized GDS dealer or technician.

Improper Maintenance
Damage resulting from failure to follow GDS recommended maintenance procedures and schedules.

Applied Paint & Coatings
Failure of paints or coatings applied after original manufacture, or damage caused by harsh cleaning chemicals.

Altered Products
Any door or component that has been modified, altered, or processed in a manner not authorized by GDS.

Weather-stripping
Weather-stripping and bottom seals are subject to normal wear and are excluded from warranty coverage.

Labour & Shipping
Labour charges, shipping costs, paint or painting, and other building materials are the responsibility of the consumer.

Acts Beyond GDS Control
Damage from accidents, natural disasters, extreme weather events, or any cause beyond GDS's reasonable control.

HOW TO MAKE A WARRANTY CLAIM

1

Contact GDS
Submit your claim in writing with proof of purchase to GDS at sherwin@dm-ind.com or call 647-588-3302

2

Inspection
An authorized GDS technician will inspect the door to verify the defect and confirm warranty eligibility

3

Resolution
At GDS's discretion, defective components will be repaired or replaced at no charge to the original purchaser

This warranty is extended only to the original purchaser and is non-transferable. GDS's obligations under this warranty are strictly limited to the repair or replacement of defective components at GDS's sole discretion. GDS shall not be liable for any consequential, incidental, or indirect damages arising from the use or inability to use the product. All other warranties, expressed or implied, including any warranty of merchantability or fitness for a particular purpose, are hereby expressly excluded. This warranty gives you specific legal rights; you may also have other rights which vary by province or territory. Specifications and warranty terms are subject to change without notice.

CELL
647-588-3302

TEXT
647-694-1600

EMAIL
sherwin@dm-ind.com

WEBSITE
www.dm-ind.com